




**POWERTRUSION  
PRODUCTS**

*“A Better Way to Deliver Power”*



**CROSS ARMS from POWERTRUSION**

- ❑ **Forerunner in Polyurethane (PUR) Technology**
- ❑ **Non-Conductive/Advanced BIL**
- ❑ **Light Weight**
- ❑ **Field Drillable**
- ❑ **UV Protected**
- ❑ **No Braces Required – Ease of Installation**

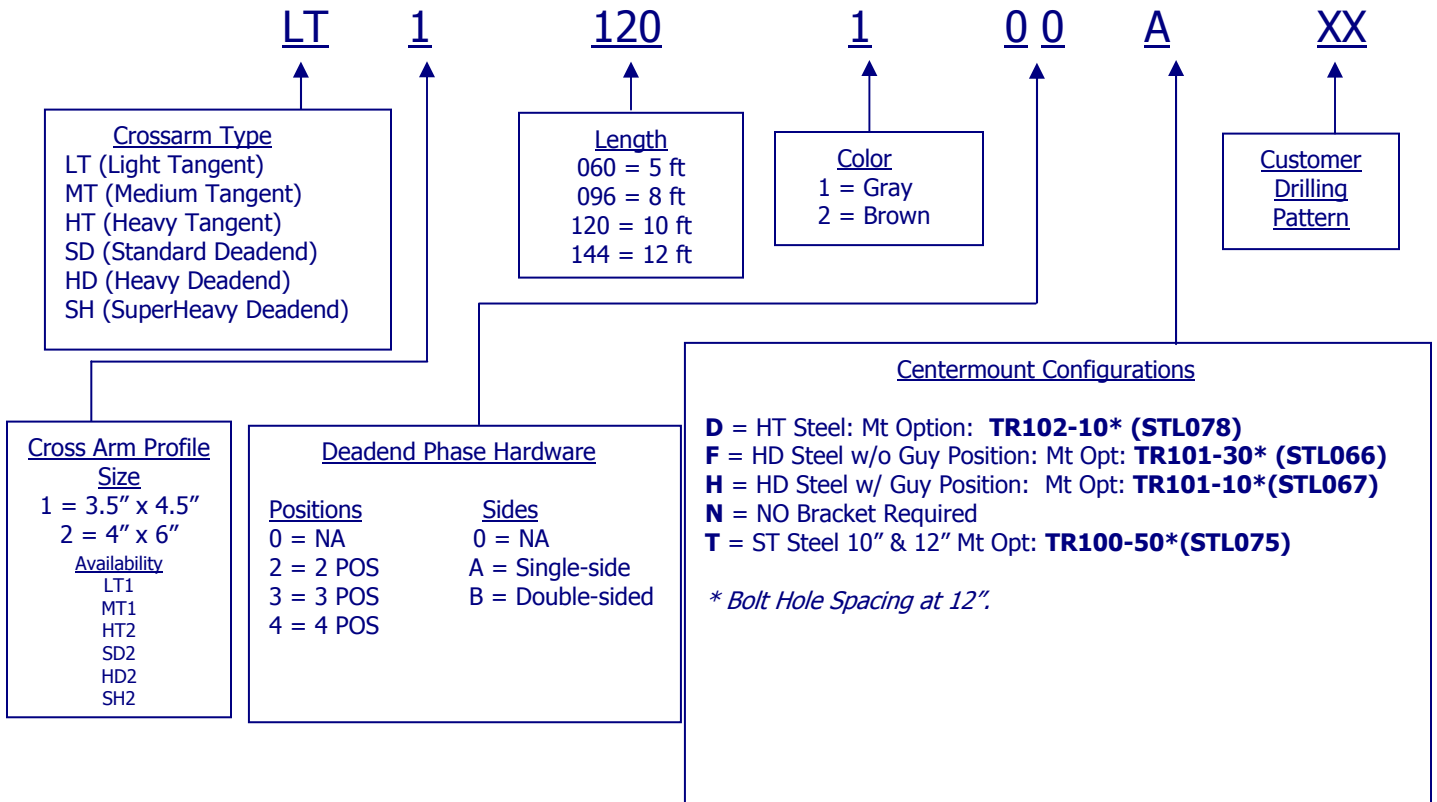

*Creative Pultrusions, Inc.*  
 214 Industrial Lane  
 Alum Bank, PA 15521

*Powertrusion Products*  
 www.powertrusion.com

*Voice: 888-274-7855*  
*Fax: 814-839-4276*  
 www.creativepultrusions.com

## **CROSS ARM SPECIFICATIONS**

### *Tangents*

LIGHT TANGENT 3-1/2" X 4-1/2"			
<u>Part Number</u>	<u>Length</u>	<u>Weight w/o Hardware</u>	<u>Ultimate Load per Phase</u>
LT1060100XXX	5' (60")	15 lbs.	5,000 lbs.
LT1096100XXX	8' (96")	24 lbs.	5,000 lbs.
LT1120100XXX	10' (120")	30 lbs.	3,800 lbs.

MEDIUM TANGENT 3-1/2" X 4-1/2"			
<u>Part Number</u>	<u>Length</u>	<u>Weight w/o Hardware</u>	<u>Ultimate Load per Phase</u>
MT1060100XXX	5' (60")	15 lbs.	5,000 lbs.
MT1096100XXX	8' (96")	24 lbs.	5,000 lbs. *
MT1120100XXX	10' (120")	30 lbs.	3,800 lbs. *

SUPURTUF POLYURETHANE HEAVY TANGENT 4" X 6"			
<u>Part Number</u>	<u>Length</u>	<u>Weight w/o Hardware</u>	<u>Ultimate Load per Phase</u>
HT2096100XXX	8' (96")	37 lbs.	10,000 lbs.
HT2120100XXX	10' (120")	46 lbs.	9,000 lbs. *
HT2144100XXX	12' (144")	56 lbs.	8,000 lbs. *

### *Deadends*

SUPURTUF POLYURETHANE STANDARD DEADEND 4" X 6"			
<u>Part Number</u>	<u>Length</u>	<u>Two Position Double Deadend Hardware</u>	<u>Ultimate Load per Phase</u>
SD209612BXXX	8' (96")	51 lbs.	10,000 lbs.
SD212012BXXX	10' (120")	62 lbs.	9,000 lbs.
SD214412BXXX	12' (144")	73 lbs.	8,000 lbs.

SUPURTUF POLYURETHANE HEAVY DEADEND 4" X 6"			
<u>Part Number</u>	<u>Length</u>	<u>Two Position Double Deadend Hardware</u>	<u>Ultimate Load per Phase</u>
HD206012BXXX	5' (60")	34 lbs.	10,000 lbs.
HD209612BXXX	8' (96")	48 lbs.	10,000 lbs. *
HD212012BXXX	10' (120")	57 lbs.	9,000 lbs. *
HD214412BXXX	12' (144")	69 lbs.	8,000 lbs.

SUPURTUF POLYURETHANE SUPERHEAVY DEADEND 4" X 6"			
<u>Part Number</u>	<u>Length</u>	<u>Two Position Double Deadend Hardware</u>	<u>Ultimate Load per Phase</u>
SH206012BXXX	5' (60")	39 lbs.	15,000 lbs.
SH209612BXXX	8' (96")	53 lbs.	15,000 lbs. *
SH212012BXXX	10' (120")	62 lbs.	12,500 lbs.
SH214412BXXX	12' (144")	72 lbs.	10,000 lbs.

*Creative Pultrusions, Inc.*  
214 Industrial Lane  
Alum Bank, PA 15521

*Powertrusion Products*  
  
www.powertrusion.com

*Voice: 888-274-7855*  
*Fax: 814-839-4276*  
*www.creativepultrusions.com*