



**POWERTRUSION
PRODUCTS**


“A Better Way to Deliver Power”



“PFRC” POLES from POWERTRUSION

- ❑ ***Lightweight and Easy to Install***
- ❑ ***Non-Conductive***
- ❑ ***Eliminates Environmental Concerns***
- ❑ ***Engineered for reliability & longevity***
- ❑ ***Increased flame retardant performance***
- ❑ ***New URETHANE POLYMER chemistry***

POWERTRUSION UTILITY POLE CATALOG NUMBER ORDERING

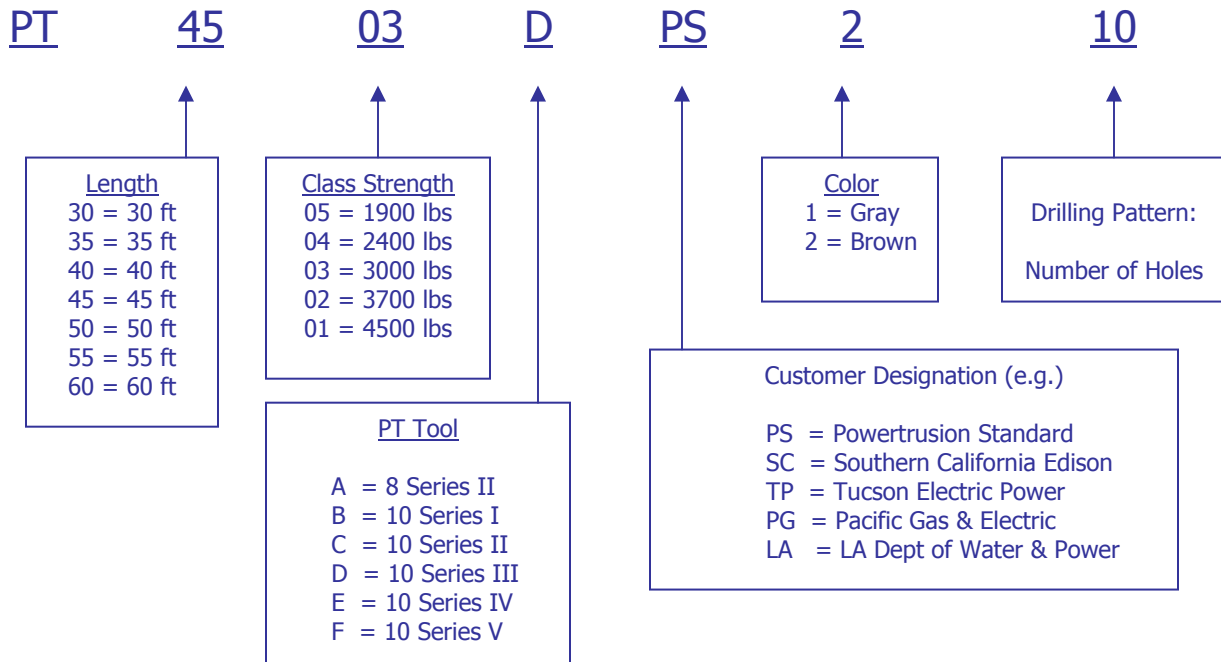

Creative Pultrusions, Inc.
 214 Industrial Lane
 Alum Bank, PA 15521

Powertrusion Products
 www.powertrusion.com

Voice: 888-274-7855
Fax: 814-839-4276
 www.creativepultrusions.com

PT UTILITY POLES: Class & Strength, Length and Weight

CLASS STRENGTH	30 ft. WEIGHT	35 ft. WEIGHT	40 ft. WEIGHT	45 ft. WEIGHT	50 ft. WEIGHT	55 ft. WEIGHT	60 ft. WEIGHT
5	8 Ser II	8 Ser II	10 Ser I	10 Ser I	10 Ser II	10 Ser II	10 Ser III
1,900 lbs	201 lbs	234 lbs	368 lbs	412 lbs	457 lbs	503 lbs	688 lbs
4	8 Ser II	10 Ser I	10 Ser I	10 Ser II	10 Ser II	10-8 Ser IV	10-8 Ser IV
2,400 lbs	201 lbs	322 lbs	368 lbs	412 lbs	457 lbs	720 lbs	820 lbs
3	10 Ser I	10 Ser II	10 Ser II	10 Ser III	10 Ser III	10-8 Ser IV	---
3,000 lbs	277 lbs	322 lbs	368 lbs	515 lbs	572 lbs	748 lbs	---
2	10 Ser II	10 Ser II	10 Ser III	10-8 Ser IV	10-8 Ser IV	---	---
3,700 lbs	277 lbs	322 lbs	459 lbs	604 lbs	698 lbs	---	---
1	10 Ser III	10 Ser III	10-8 Ser IV	10-8 Ser IV	---	---	---
4,500 lbs	346 lbs	402 lbs	550 lbs	648 lbs	---	---	---

*Creative Pultrusions, Inc.
214 Industrial Lane
Alum Bank, PA 15521*

*Powertrusion Products

www.powertrusion.com*

*Voice: 888-274-7855
Fax: 814-839-4276
www.creativepultrusions.com*